

Modular Signal Towers / KombiSIGN 71

Signal tower KS71 BWM 24VAC/DC GN/YE/RD



Part No.: 649.240.02 Series: KombiSIGN 71

MECHANICAL DATA		
Height	212 mm	
Diameter	70 mm	
Materials	PA-GF PC	
Dome colour	Green Red Yellow	
Housing colour	Black	
Protection category	IP65	
Connection	Spring-type terminal	
cross-sectional area minimum	0,25mm ² / 24AWG	
cross-sectional area maximum	1,50mm ² / 16AWG	
Cable entry	Through hole	
Cable entry maximum	d = 11 mm	
Tension relief	Not present	
Type of fixing	Base mounting Wall mounting	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	311 g	
Product weight	257 g	

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	90 mA
Rated inrush current	<500mA
Protection class	Protection class 2
Pollution degree	3

OPTICAL DATA		
Light source	LED	
Light colour	Green Red Yellow	
Optical signal image	Permanent	
Service life optical	50,000 h minimum	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Modular Signal Towers / KombiSIGN 71

Signal tower KS71 BWM 24VAC/DC GN/YE/RD


APPROVAL DATA	
Conforms with CE	Yes (through the components)
Conforms with RoHS directive	Fulfills substance restriction
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Modular Signal Towers / KombiSIGN 71

Signal tower KS71 BWM 24VAC/DC GN/YE/RD

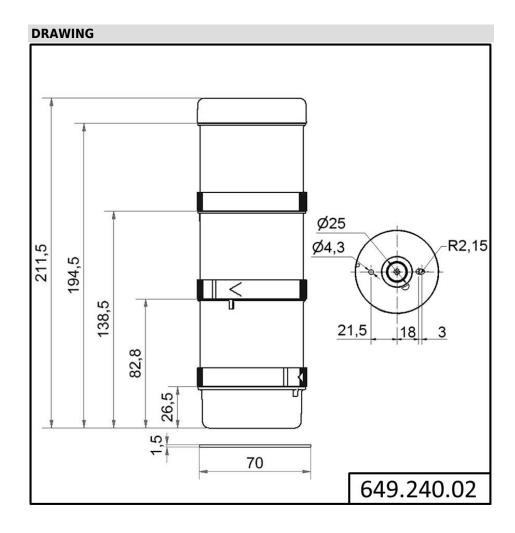

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.