Midi / EvoSIGNAL Midi TwinFLASH Combi 115-230VAC RD



| Series: | : 461.120.60 EvoSIGNAL | |
|------------------------------|---------------------------|------------------------------|
| Jenesi | EVUSIGINAL | |
| MECHAN | ICAL DATA | |
| Height | | 130 mm |
| Diameter | | 85 mm |
| Materials | | PC PC/ABS |
| Dome colour | | Red |
| Housing colour | | Grey |
| Protection category | | IP66 |
| Connection | | Push-in terminal |
| cross-sectional area minimum | | 0,25mm² / 24AWG |
| cross-sectional area maximum | | 1,50mm² / 16AWG |
| Type of fixing | | Adapter required |
| Working temperature minimum | | -30°C |
| Working temperature maximum | | +60°C |
| Weight with packaging | | 234 g |
| Product weight | | 195 g |
| ELECTRIC | CAL DATA | |
| Operating voltage | | 115-230V |
| Operating voltage type | | AC |
| Operating voltage frequency | | 50Hz at 230V 60Hz at 115V |
| Operating | voltage tolerance | +/- 10% |
| Rated operational voltage | | 230 VAC |
| Rated operational current | | 290 mA |
| Rated inru | ish current | 7A |
| Protection | class | Protection class 2 |
| Pollution degree | | 3 |
| Overvoltage category | | II |
| Isolation voltage | | Ui = 250V; Uimp = 2.500V |
| OPTICAL | DATA | |
| Light sour | | LED |
| Light colo | ur | Red |
| Optical signal image | | EVS Flash TwinFlash |
| Flash frequency | | 1 Hz |
| Service life optical | | 50,000 h minimum |
| Pulse- & pause Duration [ms] | | 280N, 1640FF, 280N, 7440FF |


Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi / EvoSIGNAL Midi TwinFLASH Combi 115-230VAC RD

| 110,0 dB (A) |
|-----------------------|
| Multi-tone |
| 10 tone |
| 3300 Hz |
| 5,000 h minimum |
| |
| Yes |
| Yes |
| Yes |
| No |
| Yes |
| cULus |
| Туре 12 |
| No |
| No |
| Yes |
| Yes (WERMA (UK) Ltd.) |
| No |
| 208 |
| |

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



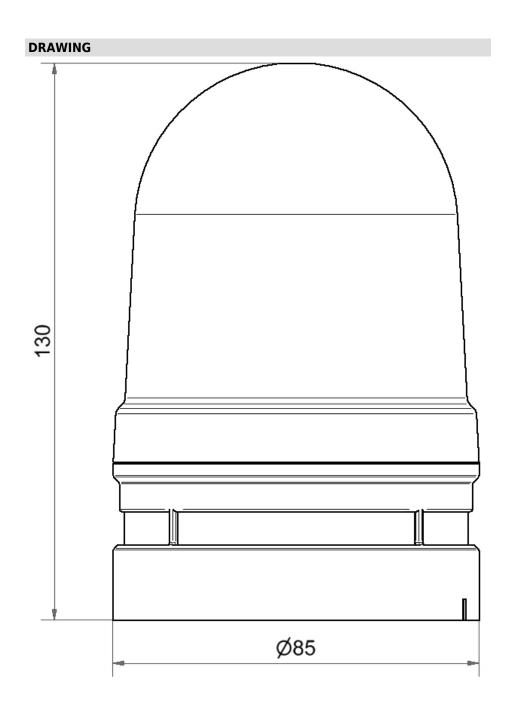

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.