

KombiSIGN 71 / WIN

## WIN transmitter KombiSIGN 71 24VAC/DC BK



Part No.: 860.640.05



### MECHANICAL DATA

Height	66 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Connection	USB
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	96 g
Product weight	77 g

### ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	40 mA
Rated inrush current	430 mA
Protection class	Protection class 2
Pollution degree	2
connectivity	WIN

### OPTICAL DATA

Service life optical	50,000 h maximum
----------------------	------------------

### APPROVAL DATA

Conforms with CE	No
Conforms with RoHS directive	Fulfills substance restriction
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	Yes
Conforms with IC	Yes
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No


! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / WIN

## WIN transmitter KombiSIGN 71 24VAC/DC BK

Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

### DRAWING

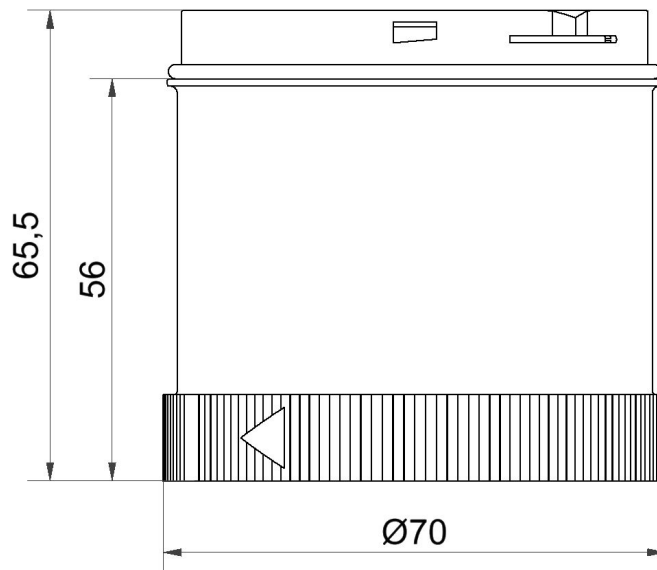

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.