

Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC BU/WH/GN



Part No.:	699.260.75			c(UL)us	UK
Series:	Kompakt 37		7	c QL) us	CA

MECHANICAL DATA	
Height	243 mm
Diameter	38 mm
Materials	PC
Dome colour	Blue Clear Green Red Yellow
Housing colour	Black
Protection category	IP65
Connection	M12 plug 8-pole
Cable entry	Membrane grommet
Cable entry minimum	d = 1 mm
Cable entry maximum	d = 9 mm
Tension relief	Pull-out protection
Type of fixing	Built-in mounting
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	173 g
Product weight	119 g

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	200 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	

OPTICAL DATA	
Light source	LED
Light colour	Blue Green Red White Yellow

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC BU/WH/GN


Optical signal image	Permanent		
Service life optical	50,000 h maximum		
ACOUSTIC DATA			
Volume (max) at 1m distance	85,0 dB (A)		
Acoustic signal image	Pulse tone		
Audio frequency	2900 Hz		
Acoustic service life	5,000 h minimum		
APPROVAL DATA			
Conforms with CE	Yes		
Conforms with RoHS directive	Yes		
WEEE	Yes		
Conforms with ATEX-directive	No		
Conforms with CCC	No		
Conforms with UL	cULus		
UL Type Rating	Type 12 Type 4X		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	Yes		
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)		
Conforms with AS-I	No		
ICAO Certification	No		
Conforms with DNV	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC BU/WH/GN

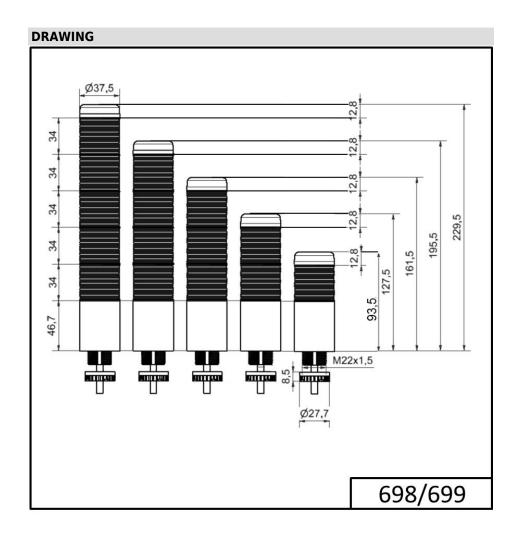

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.