Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 12VAC/DC GN/YE/R



ļ

	699.110.74			
Series:	Kompakt 37		CC – CH	
MECHANICAL DATA				
Height			175 mm	
Diameter			38 mm	
Materials			PC	
Dome colour			Green Red Yellow	
Housing colour			Black	
Protection category			IP65	
Connection			Cable	
cross-sectional area maximum		mum	0,34mm² / 22AWG	
Cable entry			Membrane grommet	
Cable entry minimum			d = 1 mm	
Cable entry maximum			d = 9 mm	
Cable length			2000 mm	
Tension relief			Pull-out protection	
Type of fixi	ng		Built-in mounting	
Working temperature minimum		imum	-20°C	
Working temperature maximum		kimum	+50°C	
Weight with packaging			200 g	
Product weight			166 g	
ELECTRICAL DATA				
Operating	voltage		12V	
Operating	voltage type		AC/DC	
Operating voltage frequency		су	50Hz	
Operating voltage tolerance		ce	+/- 10%	
Rated operational voltage			12 VDC	
Rated operational current			295 mA	
Rated inrush current			500 mA	
Protection class			Protection class 2	
Pollution degree			3 In the connection area: 2	
OPTICAL I	DATA			
Light source			LED	
Light colour			Green Red Yellow	
Optical signal image			Permanent	
Service life optical			50,000 h maximum	


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 12VAC/DC GN/YE/R

ACOUSTIC DATA	
Volume (max) at 1m distance	80,0 dB (A)
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 12VAC/DC GN/YE/R

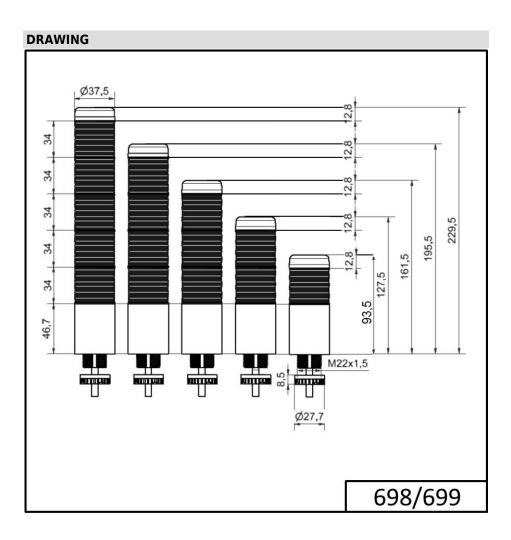

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.